

# FIREMASTER 18 TWIN DELIVERY PORTABLE PUMP



## Pump Specifications:

### Type:

Combination Transfer / Attack

### Intake:

4" (100mm) BSRT or  
3 1/2" (75mm) Female BSP

### Discharge:

Twin Screw Down 2" (50mm) BSP thread

### Volute Body And Head:

Aluminium Alloy CC601 heat-treated  
to T6 hardness

### Impeller:

Aluminium Alloy CC601 fully enclosed

### Wear Rings:

Long wearing UHMWPE, economical to replace

### Shaft Seal:

Spring-loaded mechanical

### Priming:

Exhaust Ejector, fast and easy to use.  
Will prime 3 metres in 30 seconds and up to 6 metres



## Engine Specifications

Briggs and Stratton, model 350447, Vanguard V-Twin air-cooled, overhead valve. Maximum output 18HP (13.4kw) @ 3600 RPM. 34.75 cu. In (570cc) displacement, 4 cycle. Full pressure lubrication.

### Fuel Tank:

Integral 8.5 Litre (9 qt)

### Battery:

12 Volt Gel Cell

### Starter:

12 volt electrical with manual recoil

## Dimensions and Weights - Metric

Frame Type	Length (mm)	Width (mm)	Height (mm)	Dry Weight
Stainless Steel Wrap Around	570 mm	495 mm	580 mm	74 kg (incl battery)

## Operating Controls:


Controls are easy to operate from one location and include engine on/off switch, electric start, 12 volt inlet/outlet socket, throttle control, fuel on/off valve, choke and primer operating lever.

Pump features discharge pressure gauge and compound intake gauge.

## Operational Accessories:

Mast light  
Bilge pump type primer

Pump Outputs

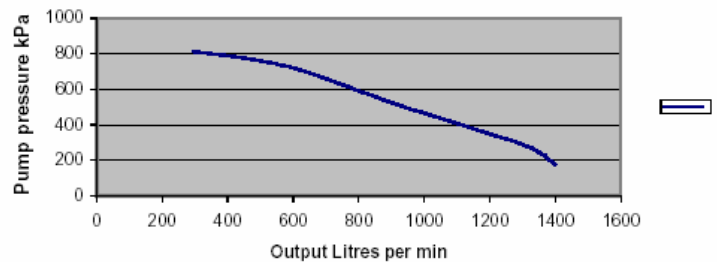

**If you do not see what you want in our brochures, please call us! We cannot show every item**  
Due to continued improvement the right is reserved to modify specifications without prior notice



PSL

PO Box 69-028, 10 Akatea Road, Glendene, Auckland 0645, New Zealand  
Ph: +64 9 8188048 Fax: +64 9 818 4484 Email: sales@firemaster.co.nz  
Web: [www.firemaster.co.nz](http://www.firemaster.co.nz)

"Fire & Safety Solutions"

Rev: 1